




Re-New


Tired of looking at that yellowed, ugly, old sealant... but put off by the thought of scraping it away?

Re-New it in the easiest way possible!


Apply on top of existing sealant. Done in minutes.

New & improved applicator: easy to use with built in auto-smoothing tool.

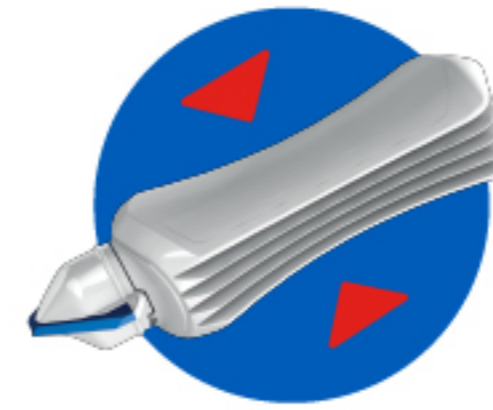

1  Clean the surface before applying

2  Place bottle on joint, then tilt to ensure tight seal between the wall/bath or sink

3  Lightly squeeze and push the bottle forward maintaining the nozzle at the same angle

4  Clean excess product with towel if necessary during application

5  For a perfect finish, repeat step 3 without squeezing

- 6H** Water Contact
- 24h** Full Cure
- 1** Storage 1 Month After Opening
- 16 Feet** Average Coverage

Correctable: If result is not satisfactory remove product immediately with paper towel/water and apply again.

After use: clean the applicator with paper towel and close the cap.

Additional Information: For use over silicones. Not for use on acrylic, FRP & Vinyl surfaces. Does not adhere to glazing, polymer based or polyurethane sealants. 18 month shelf life in unopened container.



WARNING! Contains siloxane. Avoid eye contact. Wear safety glasses when applying product. Remove contact lenses before using sealant. Wash hands after using. **FIRST AID:** For eye contact flush with water for 15 minutes. Call a physician if irritation develops and persists. For skin contact, wash with soap and water. If affected by inhalation, remove to fresh air and get medical attention. If ingested, do not induce vomiting; call a physician or Poison Control Center. **DO NOT TAKE INTERNALLY. KEEP OUT OF REACH OF CHILDREN.**

⚠️ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.
CHEMICALLY CURING SEALANT - VOC 3%

GE is a registered trademark of General Electric Company and is used under trademark license by Henkel.

Henkel Henkel Corporation For questions or information:
 One Henkel Way Call 1-877-607-7407 or
 Rocky Hill, CT 06067 visit www.gesealants.com

*Time savings compared to traditional sealant repair including removal and replacement
 **LIMITED WARRANTY: This product is covered by a Limited Warranty. For a complete statement of the terms of the Limited Warranty please refer to gesealants.com/warranty





HOW TO APPLY

- 1 Clean the surface before applying.
- 2 Place bottle on joint, then tilt to ensure tight seal between the wall/bath or sink.
- 3 Lightly squeeze and push the bottle forward maintaining the nozzle at the same angle.
- 4 Clean excess product with paper towel if necessary during application.
- 5 For a perfect finish, repeat step (3) without squeezing.

TIPS & TRICKS

- Correctable: If result is not satisfactory remove product immediately with paper towel/water and apply again.
- After use, clean the applicator with paper towel and close the cap.
- Wait 6 hours before water contact and avoid contact with cleaning agents for 24 hours after application.
- Consume within 1 month after opening to ensure full product properties.

WARNING! Contains siloxane. Avoid eye contact. Wear safety glasses when applying product. Remove contact lenses before using sealant. Wash hands after using. **FIRST AID:** For eye contact flush with water for 15 minutes. Call a physician if irritation develops and persists. For skin contact, wash with soap and water. If affected by inhalation, remove to fresh air and get medical attention. If ingested, do not induce vomiting; call a physician or Poison Control Center.

DO NOT TAKE INTERNALLY. KEEP OUT OF REACH OF CHILDREN.

⚠ WARNING: Cancer and Reproductive Harm —

www.P65Warnings.ca.gov.

CHEMICALLY CURING SEALANT - VOC 3%

GE is a registered trademark of General Electric Company and is used under trademark license by Henkel.



Henkel Corporation
One Henkel Way
Rocky Hill, CT 06067
2021

For questions or information:
Call 1-877-607-7407 or
visit www.gesealants.com
SEAL ID#: 30225401

2771772