



Technical Data Sheet

Revision: March 15, 2025
Supersedes: New
Ref. #: Tool/Article

Sealant Remover Tool

DESCRIPTION

GE Sealant Remover Tool is a 2-in-1 tough plastic tool with 2 different ends to help with removal of all types of sealants. A sharp pointed end helps remove existing sealant while the flat end helps scrape away remaining residue without damaging surfaces.

Available as:

Item #	Package	Color
3023666	Carded tool	Black

FEATURES & BENEFITS

- Fast removal without damage
- Reusable
- Achieve a professional finished look
- Easy to use

RECOMMENDED FOR

Use with all types of sealants

INSTRUCTIONS FOR USE

To remove old sealant beads:

- Push the pointed end of the tool into the sealant and push forward (Figure 1). Alternatively, use the lower point to dig into the sealant and pull towards yourself.
- Use the flat end of the tool to scrape away any residue (figure 2).
- Remove excess sealant from the Sealant Remover Tool immediately after use with a dry cloth.

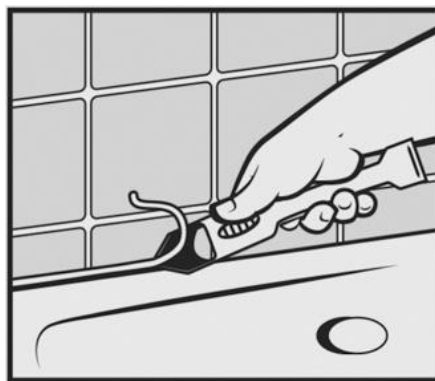


Figure 1

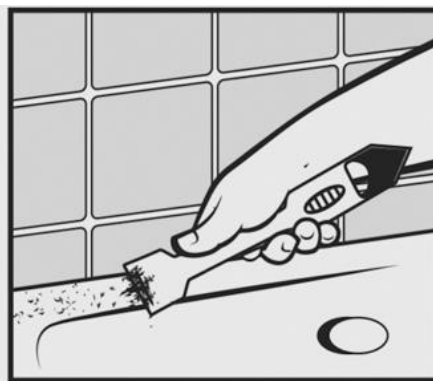


Figure 2

LABEL PRECAUTIONS

CAUTION! Sharp points and edges. **KEEP OUT OF REACH OF CHILDREN**



Technical Data Sheet

Revision: March 15, 2025
Supersedes: New
Ref. #: Tool/Article

DISCLAIMER

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Henkel recommends purchasers/users should test the products to determine acceptable quality and suitability for the intended use. All adhesive/sealant applications should be tested under simulated or actual end use conditions to ensure the adhesive/sealant meets or exceeds all required project specifications. Since assembly conditions may be critical to adhesive/sealant performance, it is also recommended that testing be performed on specimens assembled under simulated or actual production conditions. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

LIMITED WARRANTY

This product is warranted by Henkel Corporation to be free from defects in materials when used as directed. Henkel's sole obligation shall be, at its option, to replace or refund the purchase price of product proven to be defective. Henkel makes no other warranty – express or implied – including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE and will not be liable for consequential or incidental damages. This Limited Warranty gives you specific legal rights, which vary from state to state. For warranty assistance, contact Henkel at 1.877.607.7407 M-F 9:00 am to 4:00 pm ET.

GE is a registered trademark of General Electric Company and is used under trademark license by Henkel.

For Technical Assistance call : 1-877-607-7407 – Mon - Fri 9:00a – 4:00p ET

www.gesealants.com



Founded in 1876, Henkel is a global leader in the consumer and industrial businesses. Henkel operates worldwide with leading brands and technologies in three business areas: Laundry & Home Care, Beauty Care and Adhesive Technologies.

Henkel Corporation - Professional & Consumer Adhesives Headquarters - Rocky Hill, CT 06067

www.henkelna.com